




INSTALLATION INSTRUCTIONS

V-BRAKE THREADED

- Mountain Pad
- Thinline™
- Supra 2
- Phat Padd™
- BMX Contoured

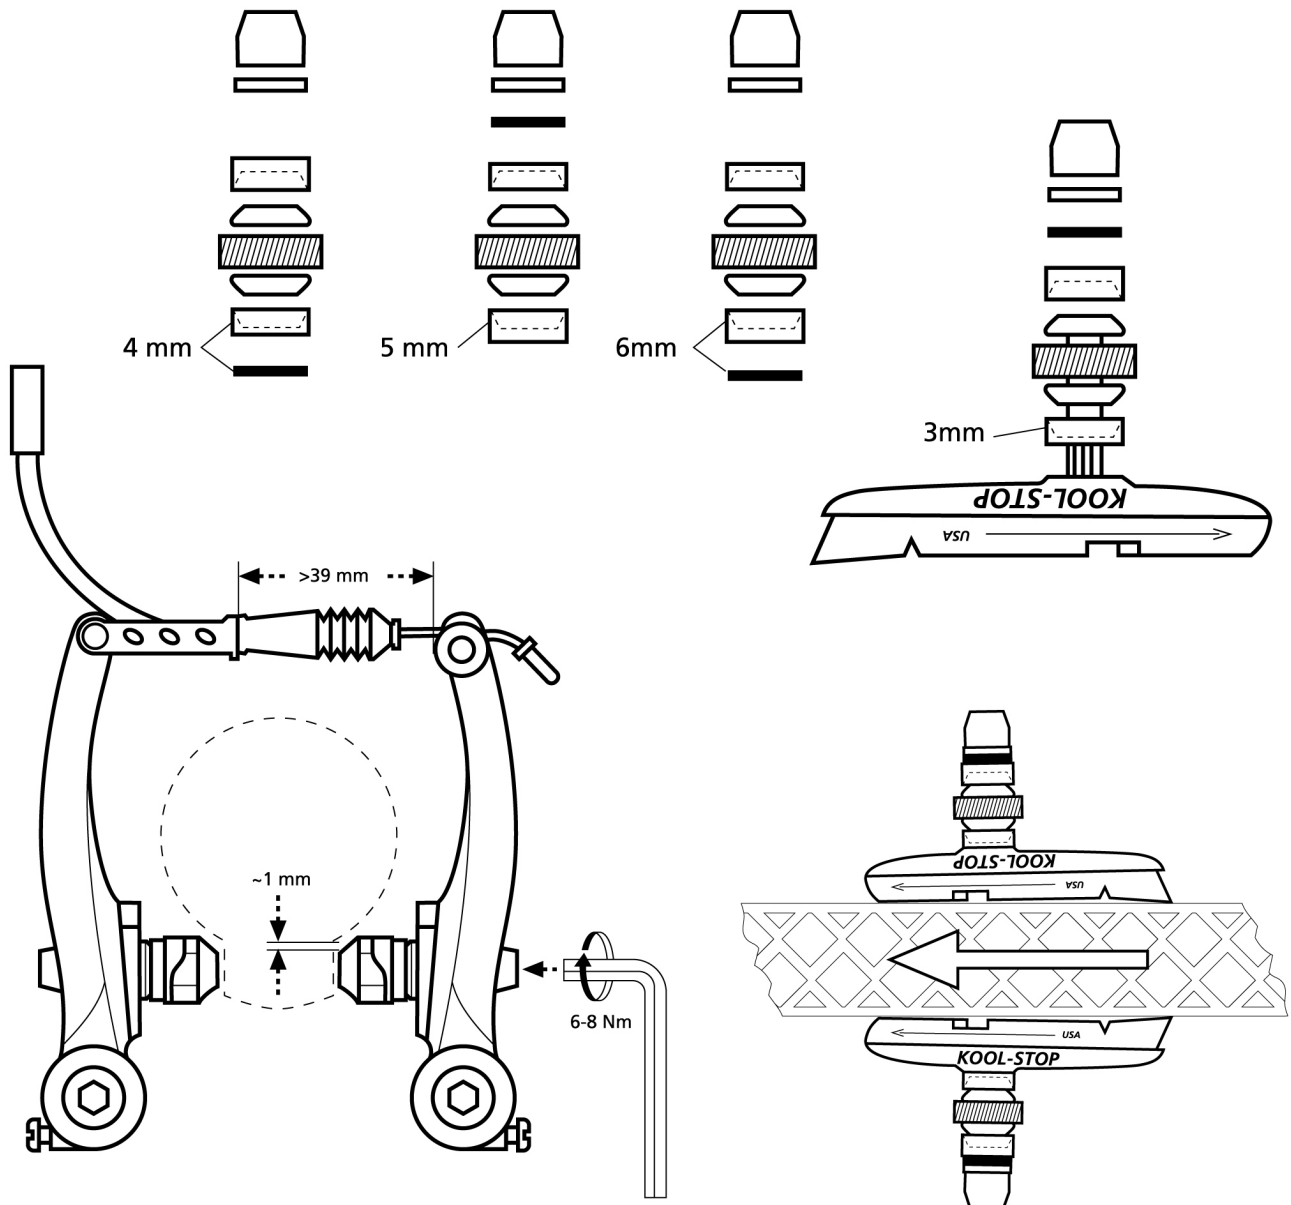

- Clean rim surface before installing new pads*
- Place new pads and finger tighten nuts*
- Align the pads correctly without touching the tire*
- Now tighten the nut with a force of 6-8 Nm.
- Check pad and rim alignment after the pads are broken in and after every ride.
- To reconfigure washers, pliers may be necessary to remove bottom washer from anti-slip base.

IMPORTANT: Designed for bicycle use only. Do not ride bike until brakes are checked and functioning properly. All Kool-Stop Pads meet or exceed C.P.S.C. and D.I.N bicycle standards*